

Fuse Holder

APPLICATION

The Fuses with fuse-links having cylindrical contact caps are used as overload short circuit protection in electric system with rated voltage of 380V, rated current up to 63A. Fuse-links with the striker are used for the purpose of protection motors against phase-failure when fitted in fuse isolators.



RT18-32 1P



RT18-32 2P



RT18-32 3P



RT14-32/63/100



HG30-32 1P



HG30-32 2P



HG30-32 3P




S01



L126




FH 2P 30A



FH 2P 30A



FH 4P 60A

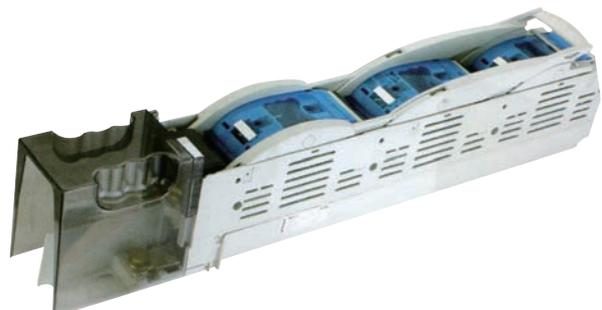

RST 3 phase